



## THE DO-ANYTHING FROM ANY-WHERE DEVICE

A Fully programmable, intelligent device that goes beyond mere monitoring of a remote site.

It can be programmed to control and manage your equipment directly, without the need for additional timers or logic controllers. Instead of only monitoring temperature, we can control it too!

Switching a pump via SMS? - We can do that automatically via built-in timers functions, and at the same time check the pressure and flow-rates, and make intelligent decisions!


Easy to figure out and well priced, it is a tool to unleash your creativity, helping you invent solutions that saves time and makes money.

## BENEFITS

- Avoid call-outs
- Improve service levels
- Get your information on-line
- Know the status of remote sites

## KEY APPLICATIONS

- Cable theft prevention
- Pumps and Irrigation
- Water treatment
- Refrigeration
- Temperature monitoring

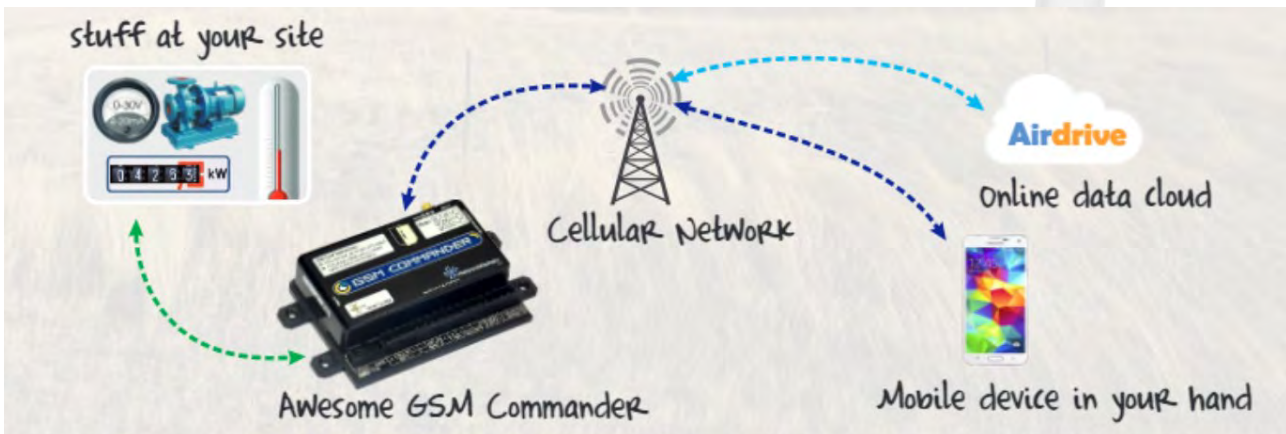

The GSM Commander is a revolutionary device combining cellular communications with powerful control and easy programming. It uses a standard SIM card and antenna to connect to a cellular network for communications.



KEY SPECIFICATIONS	
Dimensions (mm)	148X86X28
Operating voltage	14V DC
Standby current	60mA
Operating temperature	0-60°C
Terminals	Pluggable rising clamp

## SUPER-EASY PROGRAMMING

The GSM Commander is easy to setup using the Smart Setup software. Provision is made for intricate time operations, logic combinations, counting variables, time and date stipulations and a lot more.

Cellular communications enable the GSM Commander to communicate via text message (SMS), Voice Call (missed call) and GPRS. Telemetry controlling, monitoring and reporting done properly with the GSM Commander.

FEATURES	MICRO GC-0101	LITE GC-0321	STANDARD GC-0641	PRO GC-1281
Onboard Inputs / Outputs	1/1	2/2	2/2	2/2
Max Entendable I/O	NOT EXPANDIBLE	12/12	22/22	32/32
Number of Statements	10	32	64	128
Setup Memory	2kb	2kb	4kb	8kb
Temp Probe Supported	NONE	2	2+8*	2+8*
Batt / Power Monitor	YES	YES	YES	YES
0 - 10V Analogue Input	NONE	1	1	1
USB Configuration	YES	YES	YES	YES
DTMF Decoder	NO	NO	YES	YES
SIM Card slots	1	1	1	2
I/O Constraints support	NO	NO	YES	YES
Variable support	NO	NO	YES	YES
GPRS Capability	LIMITED	LIMITED	YES	YES

## AIRDRIVE REMOTE MANGEMENT

The GSM Commander communicates to the Airdrive cloud platform, allowing for liveviewing, history logs, remote updates, and more, from anywhere in the world